


SECURE CHUCK RETORQUER

The Secure Chuck Retorquer is an automatic inline cap torque machine, which torques closures onto containers consistently up to 100 BPM.

The flexible Secure Chuck Retorquer can be mounted to any conveyor; the container indexing and clamping system is easily adjusted from one container to the next. Scaled settings make repeatable set ups fast and simple. Once adjusted, containers need only satisfy the machine's start sensor and it will automatically index, clamp and torque the closures onto the containers.


The Secure Chuck Retorquer's small footprint and rugged construction make it the ideal cap torque machine to suit many industries such as Pharma, Nutraceutical, Cosmetic, Food and many more.

AUTOMATIC CAP TORQUE MACHINE



Benefits:

- Automatically torque closures onto containers consistently
- Small footprint requires minimal space on packaging lines
- Semi automatic capper; apply torque to closures manually placed on containers
- Quick changeover with minimal change parts
- Easy repeatable set ups with scaled settings
- Optional mobility kit to use Secure Chuck Retorquer on multiple packaging lines

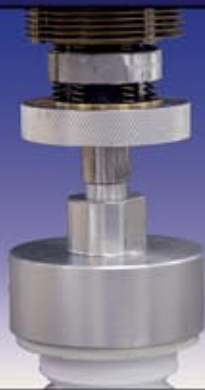

Phone No. (514) 630-0939
E-mail: info@bellatrx.com
BellatRx Inc.
245 Avro
Pointe-Claire, Quebec H9R 6A9
WWW.BELLATRX.COM

BELLATRX

SECURE CHUCK RETORQUER

AUTOMATIC CAP TORQUE MACHINE

Add the mobility kit option and the Secure Chuck Retorquer can be easily transported for use on multiple packaging lines due to its small footprint. The operator interface touch screen controls—a standard feature on the Secure Chuck Retorquer—make it easy for any first time user to set up and operate. All settings are scaled and stored in the touch screen recipes.

The Secure Chuck Retorquer can also be used as a semi automatic capper; the operator simply places a closure onto containers being fed into the Secure Chuck Retorquer. The machine will apply the appropriate torque to the closure, relieving operators of fatigue and possible repetitive motion injuries.



Technical Specifications:

- Machine speed: Up to 100 BPM
- Closure range: up to 5 inch in diameter, regular and child resistant plastic or metal caps
- Container range: round, square, rectangular, oblong 1" to 4", 12" high
- Torque range: 5-30 in-lbs
- Construction: Stainless steel, anodized aluminum and approved plastics
- Power requirements: 120 VAC - 1 – 60 Hz, 3A
- Air requirements: 3 CFM @ 90 PSI
- Dimensions: 20" W x 26" D x 66" H (Fully Raised)
- Machine weight: 80 lbs

Features:

- Operator friendly touch screen panel with on screen setup sheets
- Machine self diagnostics allow for quick fault finding
- Simple tool-less changeover for containers, tools required only to change the cap chuck
- Scaled adjustments for repeatability
- Interlocked safety guarding to prevent injury from moving parts
- Operating manual included
- Optional castors with locking dock station for mobility

As part of continuous improvement, BellatRx Inc. reserves the right to change specifications at any time without prior notice.

Represented by:

BELLATRX